

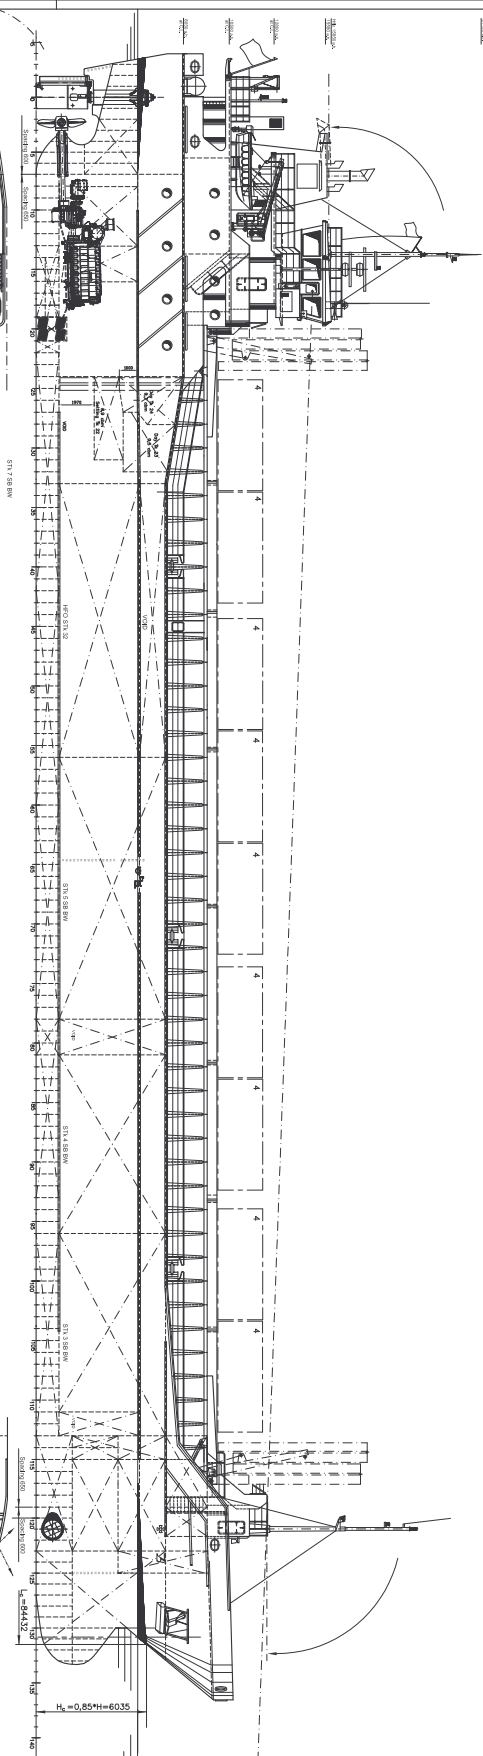



BOOTSDECK




BRIDGE DECK




COMPASS DECK

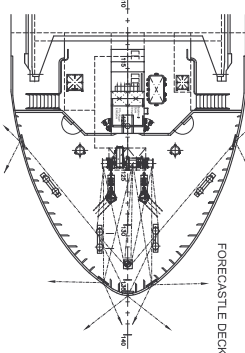


FORECASTLE DECK

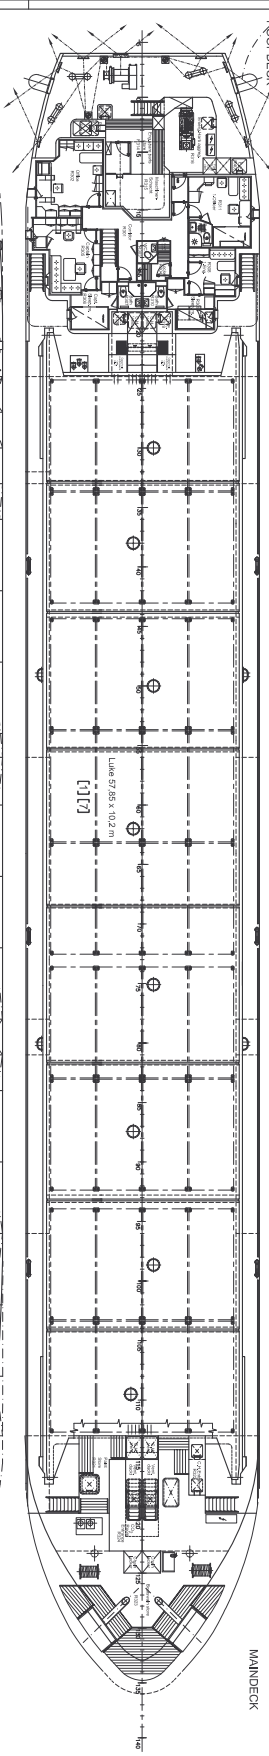


MAIN DECK

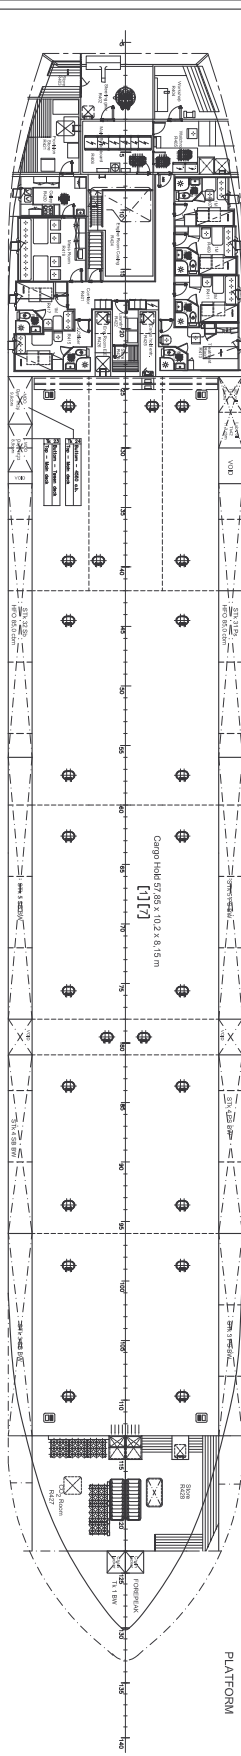

PLATFORM

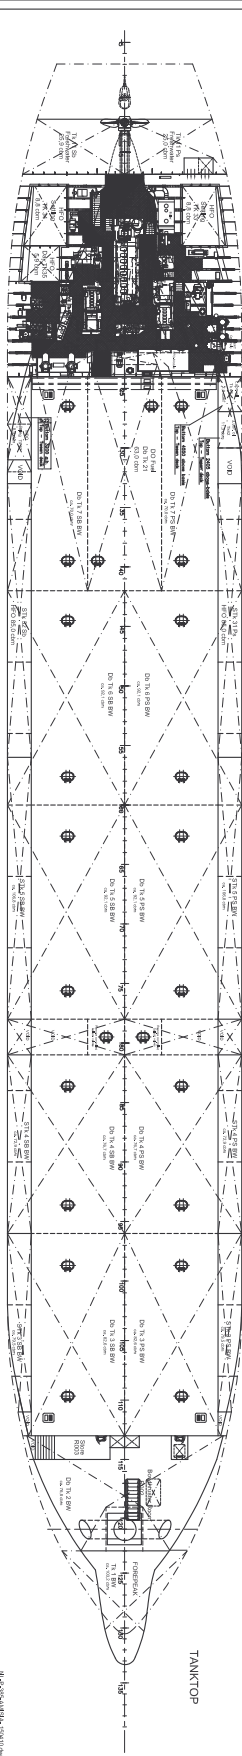

TANKTOP



CARGO MOTOR SHIP
2530 GT

MAIN DIMENSIONS

Largest overall all	89.2m
Length basic ship	64.00 m
Breadth mid	12.80 m
Depth to main deck	7.10 m
Depth to poop deck	8.00 m
Displacement in sea water ("Tow")	5.53 t
Displacement max in sea water (LDAK)	5.55 m
Onboard mass in sea water	D = 3.60m
Onboard at ballast cond.	24.2 m
Height from the baseline	15.58 m
Height THK from the baseline	15.58 m
Main engine output	150 kW at 100 rpm
Speed by test conditions and ISO NW	11.7 knots
Deadweight on capacity 1765.53m	ca. 3800 mt
Cargo dead capacity	4795 m
Cargo hold capacity (w/o ballast tanks)	38 TEU
Containers on towhooks	

Class:

Equipped for carriage of containers (On Hatchcovers only)

SCIAS 11-2 Reg. 19 [1][7]

AHTS - Additional handover lightness system

[illegible]